




# TECHNICAL SPECIFICATION SHEET

**PRODUCT NAME** Flo

**PRODUCT CODE** DYN/013/010

**PRODUCT DATA**

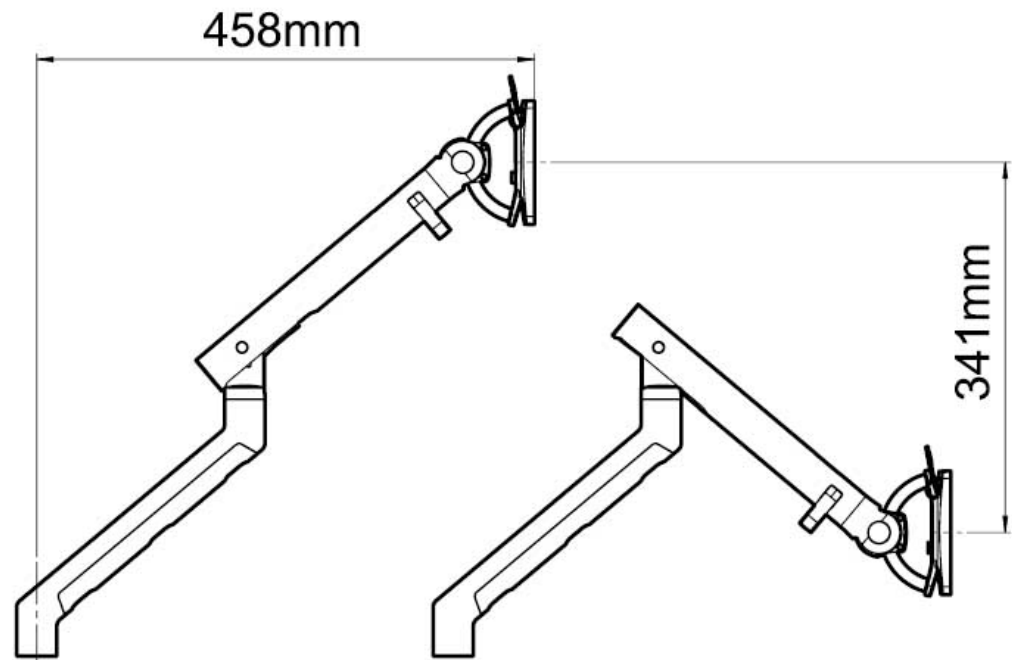

## KEY FEATURES

- Award-winning aesthetic design and functionality
- Smooth, dynamic movement through its patented Flo Spring Technology
- Unique head design provides unrivalled degree of flexibility for tablets and touch screens
- Weight gauge reduces installation time and provides consistent performance
- Integrated three-point cable management system
- Minimal environmental impact
- Portrait / landscape screen mounting
- MBDC Cradle to Cradle Silver Certification

**Product classification** Monitor Arms

**Max load** 9kg (19.84lb)

**Min load** 3kg (6.61)

**Horizontal Range** 458mm

**Vertical Range** 341mm

**Build level** C

**Box contents** Arm & Quick Release Mount Plate, Allen Key

**Recycled Content** 43%

**Total Product Recyclable** 100%



**colebrook bosson saunders**



# TECHNICAL SPECIFICATION SHEET

**PRODUCT NAME** Flo  
**PRODUCT CODE** DYN/013/010

## PRODUCT DATA

## LOGISTICAL

**Box dims (HxWxD)** 90 x 130 x 671 mm

**Carton quantity** 6

**Weight inner** 1.9 kg

**Master dims (HxWxD)** 275 x 295 x 690 mm

**Master weight** 14.6 kg

**Country of origin** China

**Country of configuration** UK

### COLOUR

### PRODUCT CODE

### EAN

Silver	DYN/013/010/S	5060270821052
Black	N/A	N/A
White	DYN/013/010/W	5060270821069
Custom colour	Subject to MOQ	

## GUARANTEE

**Guarantee term** Limited Lifetime

**Notes** Excludes quick release - warranty 2 years

## COMPLIANCE & SAFETY CERTIFICATION

Whilst no mandatory standards apply to the monitor arm product sector, all Colebrook Bosson Saunders monitor arms have been designed with appropriate articulation features, dimensional range and adjustability to conform to the requirements of BS EN ISO 9241:5 1999 Ergonomic requirements for office work with visual display terminals (VDTs).

**Conformance certification** • BS EN ISO 9241:5 1999 Ergonomic Requirements for office work with visual display terminals (VDTs). FIRA certificate of conformance  
• FIRA load testing and lifetime fatigue test - PP050. Passed as suitable for 'severe use'  
• CE Mark Certified

**Test authority** FIRA

**Safety certification** CE

**CE EN Refs** EN1001 / EN1002 / EN1004



**colebrook bosson saunders**



# TECHNICAL SPECIFICATION SHEET

**PRODUCT NAME** Flo  
**PRODUCT CODE** DYN/013/010

## PRODUCT DATA

### INTERNAL TEST MEASURES

**Test parameter** Motion Joint Full-Cycle Load without Failure

**Test value** 13800 cycles

**Test parameter 2** Full Flexure of Middle Joint under Load without Failure

**Test value** 10.2kg

**Test parameter 3** Rotation of Arm on Post through 180° Under Load without Failure

**Test value** 10.2kg

### ENVIRONMENTAL

Material - Type	Material type weight	% PIR of total weight	% PCR of total weight	% of total product recyclable
Die Cast Aluminium	924 g.	18%	16%	36%
Steel	1229 g.	1%	5%	48%
Plastic	251 g.	0%	0%	10%
Zinc	183 g.	2%	2%	6%
-				
-				
Total	2587 g.	21%	23%	100%

### CLEANING STORAGE & MAINTENANCE

**Routine servicing** Periodic inspection

**Service components** Available to order

**Cleaning & Maintenance** Damp cloth, no abrasives, no solvents to be used on the cosmetic surfaces

**Handling & Storage** Do not drop or expose to moisture

Colebrook Bosson Saunders (Products) Ltd accept no liability for the accuracy of the information contained herein and retain the right to modify the specifications or data contained herein without prior notification

**Sheet last modified:** 01/07/2013