


NOVUS LiftTEC arm I Dual

The high-grade NOVUS LiftTEC®-Arm I of diecast aluminium is a double monitor supporting arm for the high-quality attachment of two monitors one upon the other or side by side.

A gas pressure spring allows the monitors height to be infinitely adjusted with just two fingers. The arm can be pivoted 180° in the working area, has a reach up to 415 mm and two ball-joints for almost unlimited freedom of movement for every monitor. Setting the user's ideal position is consequently child's play and a change of posture possible at any time.

The quick-release mechanism with 1-lever operation allows each of the two monitors weighing 3-7 kg to be attached without undue effort. It is equipped with the standard, widely used flat-screen mount 75 x 75 and 100 x 100 for the mounting of all normal flat-screens. The monitor cables are guided through cable clamps and the cable entry in the base.

The table attachment allows the arm to be secured with a clamp, cable port or drilling screw fitting.

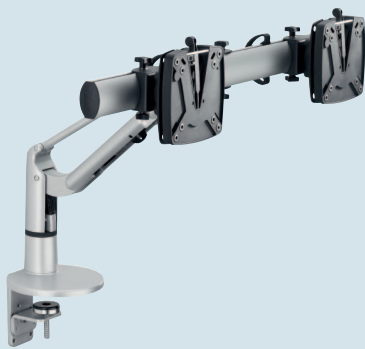

Version



silver / anthracite

Art.No.

930+1279+000

Bar code

4009729046456

Equipment



The LiftTEC® arm with gas spring technology can be infinitely adjusted to any height with incredible ease.



The adapter plate permits the straightforward attachment of all monitors with the standard 75 or 100 mount.



The product can be turned to either side and has the mentioned reach in mm.



When used conventional.



This machine bears the GS approval of product safety.



The quality statement „German Engineering“ ensures that a product was developed according to german quality standards by our engineering experts. All Novus products carrying the German Engineering by Novus signet are manufactured in our own plants around the world by our own workforce, managed and supervised by our own headquarters in Germany.

NOVUS LiftTEC arm I Dual



The LiftTEC® arm with convenient gas spring technology can be infinitely adjusted to any height with incredible ease.



The easy-action rotating joints can be adjusted to any position.



Cables are routed through the base of the LiftTEC arm.



Monitor is easy to attach using QuickRelease with single-lever operation. Ball-joint for selecting the optimum viewing angle as well as for utilising the monitor pivoting function.

NOVUS LiftTEC arm I Dual



Cable clips for perfect cable management along and inside the support arm.



Adjustable gas springs allow the LiftTEC[®] arm to be adjusted to the weight of the monitor.



The monitor is attached and released with effortless ease thanks to the new, simple Quick Release system with single-lever operation.